


- KEYNOTES**
- 1 PRE-FAB ROOF TRUSSES AT 24" o.c. (TP)
 - 2 GIRDER TRUSS
 - 3 BEAM
 - 4 CALIFORNIA FRAMING, EXTENDED ROOF SHEATHING UNDER FRAMING (TP)

CONSTRUCTION NOTES

1. ALL RAFTERS SHALL BE: 2 X (8)" @ 24" C/C (UON)
2. ALL PRE-ENGINEERED TRUSSES @ 24" C/C (UON)
3. ALL HOIS, VALLES, RIDGES SHALL BE: 2 X (6)" @ 16" C/C (UON)
4. FASCIA & BARGE RAFTERS SHALL BE: 2 X (8)"
5. ROOF PITCHES SHALL BE: 5 : 12 (UON)
6. VENT ROOF MIN. 1/150 OF VENTABLE SPACE (EVERY FOURTH FRIEZE BLOCK SHALL BE SCREENED VENT) (SEE DETAIL SHEET FOR ALTERNATES)
7. ROOF COVERINGS SHALL BE:
 - (a) CONC. TILE _____ OVER _____
 - (b) 30 # FELT _____ OVER _____
 - (c) 1/2" CDX PLY (CCX @ 0.4'S) _____ OVER RAFTERS.
8. RAIN GUTTERS & DOWNSPOUTS SHALL BE GALV. MTL., ETCHED, PRIMED, PAINTED & OF THE FULL FASCIA TYPE (OR MATCH EXISTING).
9. ALL CEILING JOISTS SHALL BE 2 X 6" @ 16" C/C (UON) DF#2; DESIGN SPAN = 17'-8".
10. PROVIDE 22 X 30" ATTIC ACCESS.
11. PROVIDE STROUBRACKS @ 6'-0" C/C.
12. PROVIDE FLASHING @ ALL PENETRATIONS.
13. APPROX. SPARE PRESSURE SHALL BE INSTALLED 24" ABOVE THE HIGHEST POINT OF THE ROOF 10' AWAY MEASURED HORIZONTALLY.
14. CRICKETS SHALL BE CONSTRUCTED OF 2X4" @ 24" C/C & COVERED W/ 1/2" CDX PLY, FLASH AS REQUIRED.
15. RUN PLYWOOD ROOF DECKING PERPENDICULAR TO ROOF FRAMING.
16. NO PLYWOOD PIECE SHALL BE LESS THAN 1/2" IN ITS LEAST DIMENSION.
17. ALL ROOF DESIGN PRO-DIMENSIONS & DESIGNED BY THIS FIRM SHALL BE SUBJECT TO THE MICRO-LAW & PARALLEL ARE TRADEMARK NAMES OF "TRUSS JOIST CORP." NOTE: THE MICRO-LAW & PARALLEL ARE TRADEMARK NAMES OF "TRUSS JOIST CORP."
18. PROVIDE EDGE WALKING TO ALL BLOCKING OR RIM JOISTS, CONNECT ALL BLOCKING OR RIM JOISTS, WHICH OCCUR IN SHEARWALL LINES, TO TOP PLATES W/ SIMPSON L50 FRAMING CLIPS @ 48" C/C (UON).
19. PROVIDE CONTINUOUS BLOCKING OF ALL BEARING WALLS, SHEARWALLS, BEAMS, & HEADERS.
20. INTENTION (BETWEEN SPACES) BRACING SHALL BE WITH 2X4" OR 4X4" BRACING SUPPORTS SHALL BE FASTENED TO THE SHEARWALLS FROM THE HORIZONTAL.
21. ALL HEADERS TO BE 4X12" DF#2 OR BTR. UON.

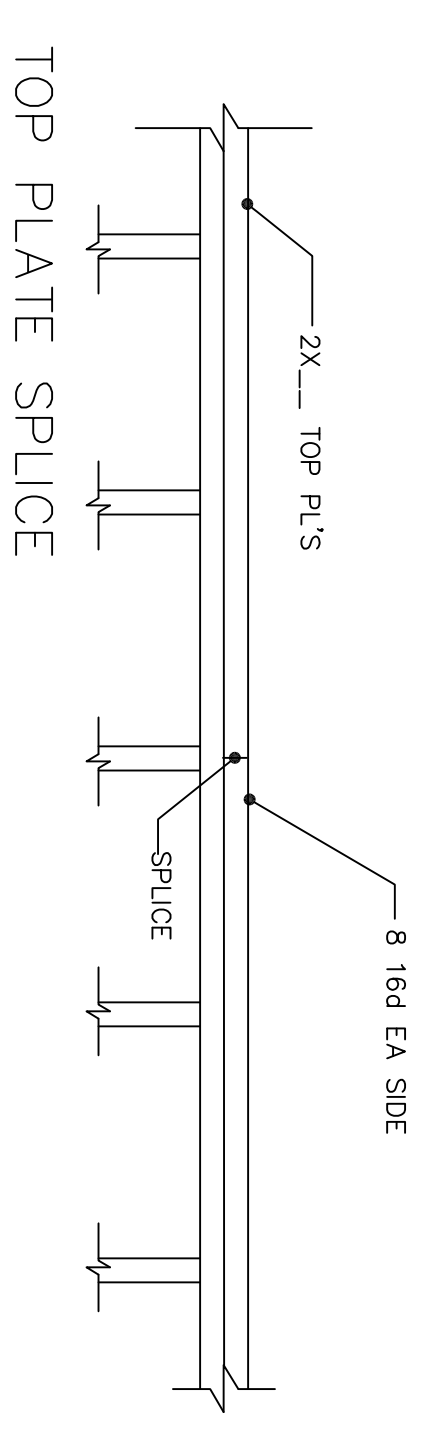

ROOF FRAMING PLAN
SCALE: 3/16" = 1'-0"